

TA3 D S080 - 1380 002

Laufrad:

Impeller: Ø 132 mm

Girante:

T1811163 132 -> 132mm; 2935 -> 3600rpm

Feststoffe bis:




Solids up to: Ø 32 mm

Solidi fino a:

Umdrehung:


Speed: ~ 3600 min⁻¹

Velocità:

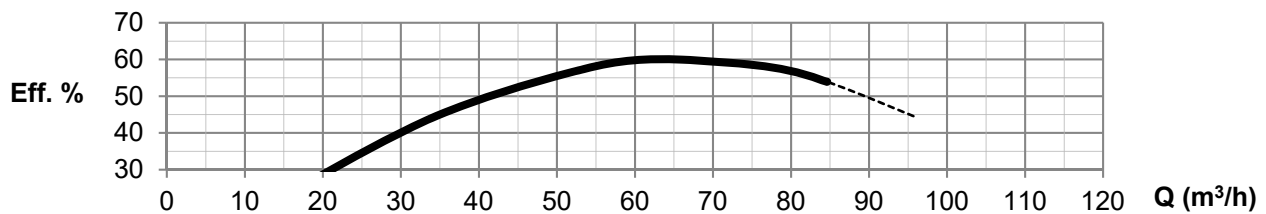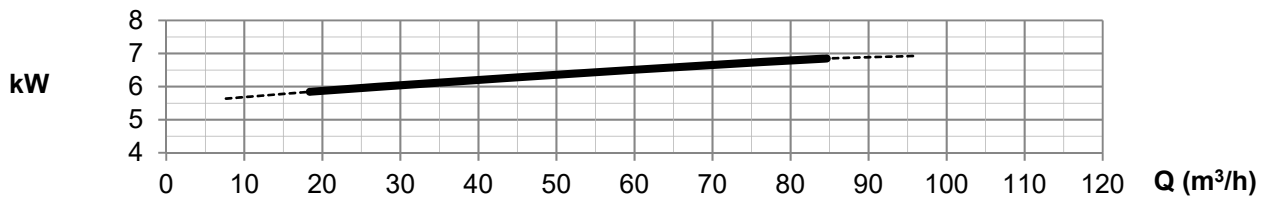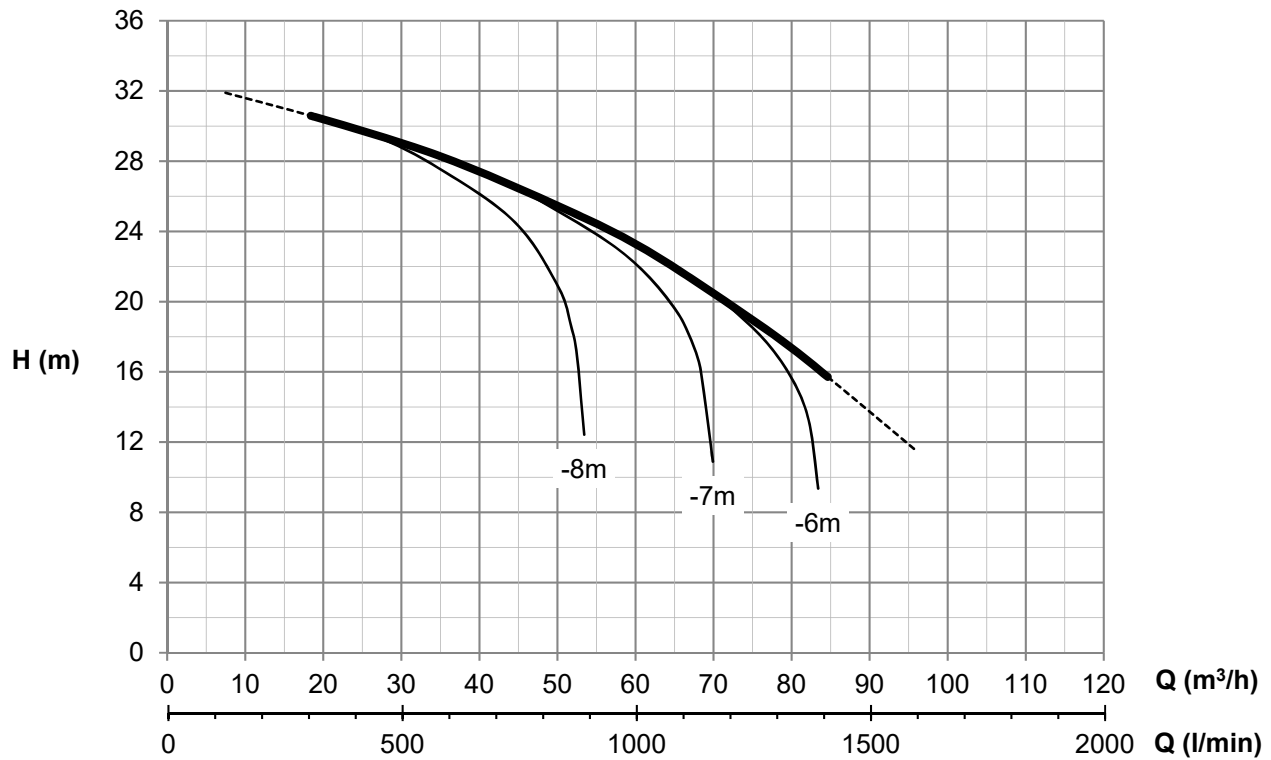

calculated

DN 80



m/s