

DS2 D S150 - 3815 002

Product codes:

Reference: 3815 002

Product short description:

Skid with tankframe and lifting hook assembled with Diesel engine and self-priming centrifugal pump Type Victor Pumps S150 (Q max: 300 m³/h; H max: 30 m) with following features:

- → Hatz Diesel engine
- \rightarrow Close-coupled
- \rightarrow Stage V (EU)
- \rightarrow OPS (Pino Pumps overload-protection-system)
- \rightarrow Electric start
- → Battery 80 Ah
- \rightarrow Frame with integrated 185 ltr. fuel tank (Type 8015) and battery-cover
- \rightarrow Galvanised towable Skid frame
- \rightarrow Tool box prepared for lock (34x15x30 cm)
- \rightarrow PinoPumps standard stainless steel name plate with product name and serial number

Product features:

Main Features	
Pump Flow Rate: max 300 m ³ /h (5000 l/min)	
Pump head: max 30 m	
Max. Solids Handling: 72x50 mm	
Self-priming: ★★★☆	
Heavy-duty: ★★★☆	



DS2 Skid with tankframe and lifting hook

5(Atable for the EU sales area: Yes

Suitable for the US sales area: NO

Suitable for non regulated sales areas: Yes

Frame

Suitable for solid ground: Yes

Suitable for muddy and sandy terrains: Yes

Lifting hook: Yes

Can be moved by hand: NO

Can be towed with a vehicle: Yes

Towing bar with hook: NO

Document box prepared for lock: NO

Tool box prepared for lock: Yes

Tank on engine: NO

Tank integrated in frame: Yes

Tank Capacity: 185 |

Pump

Type of Pump: Self-priming centrifugal pump

Pump manufacturer: Victor Pumps

Suction port: 6"

Discharge port: 6"

Type of ports: Counter flanges to weld

Type of self-priming: Wet-prime

Vaccum pump: NO

Inspection cover for the impeller: Yes

Filling port: Yes

Drain Port: Yes

Plug for Vacumeter: Option

Plug for the Manometer: Option

Material of casing: Cast iron

Material of impeller: Ductile Cast-iron

Material of wear plate: Steel

Material of shaft: Stainless steel AISI420

Material of non-return valve: NBR

Shaft sealing: WWN tungsten carbide tungsten carbide NBR

Performance data

Max vacuum with water: max 8 m (9, 5 m for 10 min)

Max vacuum with air: max 8, 5 m



Battery Size: 80 Ah

Battery-cover: Yes

Switchboard: Yes


Indicators on the panel: Oil Pressure, Power-Battery Supply

Paint: RAL1006 maize yellow

External Dimensions (L x W x H): 1750 x 940 x 1514 mm

Net Weight: 728 kg

Product gallery:

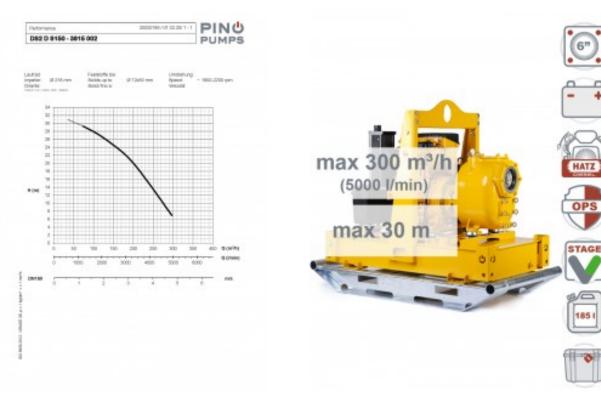

PINO PUMPS GmbH Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com





PINO PUMPS GmbH Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com






PINO PUMPS GmbH

Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com



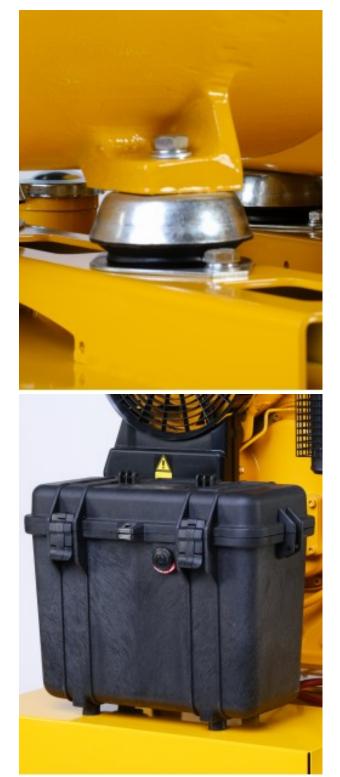



PINO PUMPS GmbH Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com













