



TA3 D S080 - 1380 002

Product codes:

Reference: 1380 002

Product short description:

Trolley with lifting hook and rubber wheels assembled with Diesel engine and self-priming centrifugal pump Type Victor Pumps S 80 (Q max: 85 m³/h; H max: 30 m) with following features:

- → Hatz Diesel engine
- → Close-coupled
- → Without omologation (no EU market)
- → OPS (Pino Pumps overload-protection-system)
- → Electric and manual start
- → Battery 50 Ah
- → PinoPumps standard stainless steel name plate with product name and serial number

Product features:

Main Features Pump Flow Rate: max 85 m³/h (1400 l/min) Pump head: max 30 m Max. Solids Handling: 32 mm Self-priming: ★★☆☆ Heavy-duty: ★★☆☆ Frame: Single-axle trolley Suitable for the EU sales area: No

PINO PUMPS GmbH

Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com



Suitable for the US sales area: No

Suitable for non regulated sales areas: Yes

Frame

Type of Tyre: Solid rubber wheels with tractor profile

Suitable for solid ground: Yes

Suitable for muddy and sandy terrains: Yes

Lifting hook: Yes

Can be moved by hand: Yes

Can be towed with a vehicle: No

Towing bar with hook: No

Document box prepared for lock: No

Tool box prepared for lock: No

Tank on engine: Yes

Tank integrated in frame: No

Tank Capacity: 5 |

Pump

Type of Pump: Self-priming centrifugal pump

Pump manufacturer: Victor Pumps

Suction port: 3"

Discharge port: 3"

Type of ports: Female Thread BSP

Type of self-priming: Wet-prime

Vaccum pump: No

Inspection cover for the impeller: Yes

Filling port: Yes

Drain Port: Yes

Plug for Vacumeter: Option

Plug for the Manometer: Option

Material of casing: Cast iron

Material of impeller: Cast iron

Material of wear plate: Steel

Material of shaft: Stainless steel AISI316

Material of non-return valve: NBR (Nitrile)

Shaft sealing: YCV Mechanical Seal with Grease Lubrication in SiC/SiO₂/FKM (Viton®) on Stainless Steel

Sleeve

Performance data

Max vacuum with water: max 8 m (9, 5 m for 10 min)

Max vacuum with air: max 7, 5 m



Battery Size: 50 Ah

Battery-cover: Partial

Switchboard: Yes


Indicators on the panel: Oil Pressure, Power-Battery Supply


Paint: RAL1006 maize yellow

External Dimensions (L x W x H): 754 x 629 x 1004 mm

Net Weight: 150 kg

Product gallery:

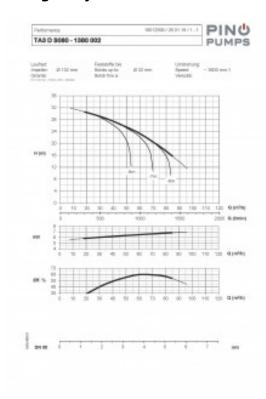

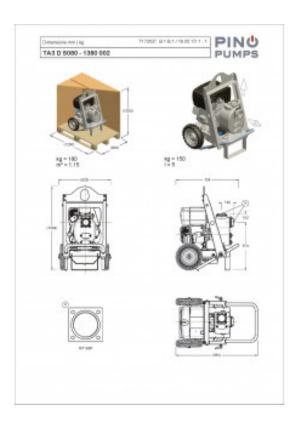

Germany - Dieselstraße 7 - 85551 Kirchheim bei München Tel. +49 89 9048660 - Fax +49 89 9043447 e-mail: info@pinopumps.com - www.pinopumps.com





